

A practical, flexible solution for controlling vehicle access without permanent obstruction. Our non-locking removable bollard provides reliable protection and clear access control, while allowing quick and easy removal when required. Ideal for driveways, car parks, pedestrian areas, service stations and restricted-access zones.



Outside Diameter (OD)	Wall Thickness	Overall	Above Ground	Cast In Sleeve	Product Code	
					Galvanised	Powder Coated
90mm	4mm	1200mm	900mm	300mm	R90C-1200G	R90C-1200P
90mm	4mm	1500mm	1200mm	300mm	R90C-1500G	R90C-1500P
101mm	4mm	1200mm	900mm	300mm	R101C-1200G	R101C-1200P
101mm	4mm	1500mm	1200mm	300mm	R101C-1500G	R101C-1500P
115mm	4.5mm	1200mm	900mm	300mm	R115C-1200G	R115C-1200P
115mm	4.5mm	1500mm	1200mm	300mm	R115C-1500G	R115C-1500P
140mm	5mm	1200mm	900mm	300mm	R140C-1200G	R140C-1200P
140mm	5mm	1500mm	1200mm	300mm	R140C-1500G	R140C-1500P
165mm	5mm	1300mm	900mm	400mm	R165C-1300G	R165C-1300P
165mm	5mm	1600mm	1200mm	400mm	R165C-1600G	R165C-1600P
220mm	4.8mm	1300mm	900mm	400mm	R220C-1300G	R220C-1300P
220mm	4.8mm	1600mm	1200mm	400mm	R220C-1600G	R220C-1600P
273mm	4.8mm	1300mm	900mm	400mm	R273F-1300G	R273F-1300P
273mm	4.8mm	1600mm	1200mm	400mm	R273F-1600G	R273F-1600P
323mm	4.8mm	1300mm	900mm	400mm	R323F-1300G	R323F-1300P
323mm	4.8mm	1600mm	1200mm	400mm	R323F-1600G	R323F-1600P

Standard Features

All bollards are supplied with:

- Bollard: Medium CHS to AS/NZS 1163:2016 and AS/NZS 4792
- Cast in Galvanise Non-Lidded sleeve
- Tape: 50 mm Class 1 Reflective Band to AS/NZS 1906.1:2017
- Finish: Galvanised or Powder Coated standard colour to AS/NZS 4506
Standard Powder Coat Colours: Y14 Safety Yellow, Gloss Black, Pearl white.
- Top: Cap top

Available Options

- Custom heights manufactured in-house to order.
- Heavy Wall Thickness: 5.4-12.7mm
- Handles
- Alternative bollard tops/Lifting accessories:




Lifting Handle

Applications

Suitable For:

- Commercial and retail property access control
- Car parks and restricted parking areas
- Driveways and private accessways
- Warehouses and industrial facilities
- Pedestrian zones and shared pathways
- Schools, universities and community facilities
- Parks, reserves and public spaces
- Emergency and service vehicle access points
- Protection of building entrances and assets

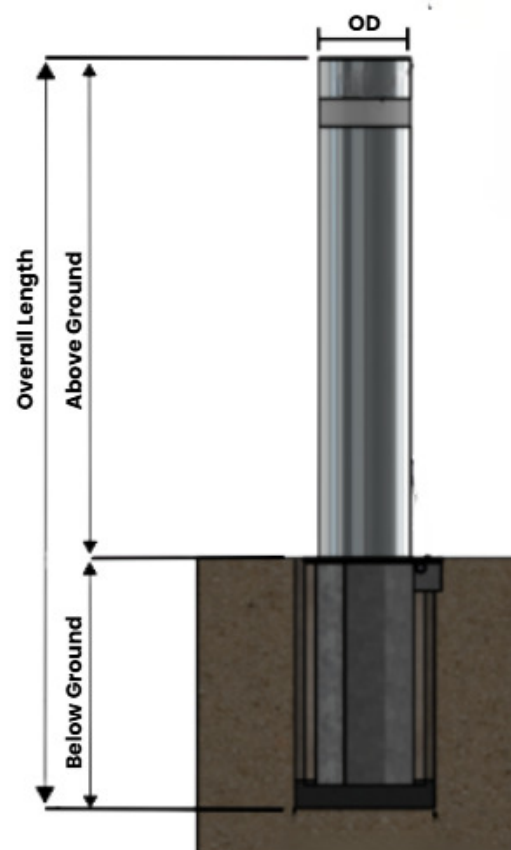

A practical, flexible solution for controlling vehicle access without permanent obstruction. Our non-locking removable bollard provides reliable protection and clear access control, while allowing quick and easy removal when required. Ideal for driveways, car parks, pedestrian areas, service stations and restricted-access zones.

Outside Diameter (OD)	Wall Thickness	Overall	Above Ground	Cast In Sleeve	Product Code	
					304 Stainless	316 Stainless
90mm	3.05mm	1200mm	900mm	300mm	R90F-1200S10-304	R90F-1200S10-316
90mm	3.05mm	1500mm	1200mm	300mm	R90F-1500S10-304	R90F-1500S10-316
101mm	3.05mm	1200mm	900mm	300mm	R101F-1200S10-304	R101F-1200S10-316
101mm	3.05mm	1500mm	1200mm	300mm	R101F-1500S10-304	R101F-1500S10-316
115mm	3.05mm	1200mm	900mm	300mm	R115F-1200S10-304	R115F-1200S10-316
115mm	3.05mm	1500mm	1200mm	300mm	R115F-1500S10-304	R115F-1500S10-316
141mm	3.40mm	1200mm	900mm	300mm	R141F-1200S10-304	R141F-1200S10-316
141mm	3.40mm	1500mm	1200mm	300mm	R141F-1500S10-304	R141F-1500S10-316
168mm	3.40mm	1300mm	900mm	400mm	R168F-1300S10-304	R168F-1300S10-316
168mm	3.40mm	1600mm	1200mm	400mm	R168F-1600S10-304	R168F-1600S10-316
220mm	3.76mm	1300mm	900mm	400mm	R220F-1300S10-304	R220F-1300S10-316
220mm	3.76mm	1600mm	1200mm	400mm	R220F-1600S10-304	R220F-1600S10-316
273mm	4.57mm	1300mm	900mm	400mm	R273F-1300S10-304	R273F-1300S10-316
273mm	4.57mm	1600mm	1200mm	400mm	R273F-1600S10-304	R273F-1600S10-316
323mm	4.57mm	1300mm	900mm	400mm	R323F-1300S10-304	R323F-1300S10-316
323mm	4.57mm	1600mm	1200mm	400mm	R323F-1600S10-304	R323F-1600S10-316




Standard Features - Stainless Steel

All bollards are supplied with:

- Bollard: Stainless Steel SCH 10 CHS to AS/NZS 4673
- Surface Mount Key Lockable Base Plate
- Tape: 50 mm Class 1 Reflective Band to AS/NZS 1906.1:2017
- Finish: Polished
- Top: Tamper proof security cap

Available Options:

- Custom heights manufactured in-house order
- Heavy Wall Thickness: 4.8-12.7mm
- Custom Powder Coat Colours
- Handles
- Additional Bollard Tops:

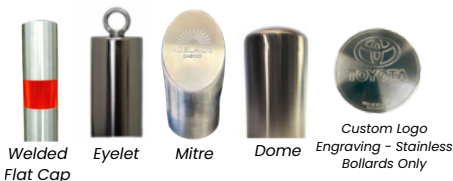

Applications

Suitable For:

- Commercial and retail property access control
- Car parks and restricted parking areas
- Warehouses and industrial facilities
- Pedestrian zones and shared pathways
- Schools, universities and community facilities
- Protection of building entrances and assets

