

Secure your site with a flexible, practical access-control solution. Removable bollards provide reliable protection against unauthorised vehicle access while allowing convenient removal when access is required. Designed for durability and ease of use, they're ideal for driveways, car parks, commercial properties, pedestrian areas and more.



Outside Diameter (OD)	Wall Thickness	Overall Length	Above Ground	Cast In Sleeve	Product Code	
					Galvanised	Powder Coated
90mm	4mm	1200mm	900mm	300mm	PR90C-1200G	PR90C-1200P
90mm	4mm	1500mm	1200mm	300mm	PR90C-1500G	PR90C-1500P
101mm	4mm	1200mm	900mm	300mm	PR101C-1200G	PR101C-1200P
101mm	4mm	1500mm	1200mm	300mm	PR101C-1500G	PR101C-1500P
115mm	4.5mm	1200mm	900mm	300mm	PR115C-1200G	PR115C-1200P
115mm	4.5mm	1500mm	1200mm	300mm	PR115C-1500G	PR115C-1500P
140mm	5mm	1200mm	900mm	300mm	PR140C-1200G	PR140C-1200P
140mm	5mm	1500mm	1200mm	300mm	PR140C-1500G	PR140C-1500P
165mm	5mm	1300mm	900mm	400mm	PR165C-1300G	PR165C-1300P
165mm	5mm	1600mm	1200mm	400mm	PR165C-1600G	PR165C-1600P
220mm	4.8mm	1300mm	900mm	400mm	PR220C-1300G	PR220C-1300P
220mm	4.8mm	1600mm	1200mm	400mm	PR220C-1600G	PR220C-1600P
273mm	4.8mm	1300mm	900mm	400mm	PR273F-1300G	PR273F-1300P
273mm	4.8mm	1600mm	1200mm	400mm	PR273F-1600G	PR273F-1600P
323mm	4.8mm	1300mm	900mm	400mm	PR323F-1300G	PR323F-1300P
323mm	4.8mm	1600mm	1200mm	400mm	PR323F-1600G	PR323F-1600P


Standard Features

All bollards are supplied with:

- Bollard: Medium CHS to AS/NZS 1163:2016 and AS/NZS 4792
- Sleeve: Cast in galvanised lidded sleeve to AS/NZS 4680
- Tape: 50 mm Class 1 Reflective Band to AS/NZS 1906.1:2017
- Finish: Galvanised or Powder Coated standard colour to AS/NZS 4506
Standard Powder Coat Colours: Y14 Safety Yellow, Gloss Black, Pearl white.
- Top: Standard Cap or Handle Cap

Available Options


- Custom heights manufactured in-house to order.
- Heavy Wall Thickness: 5.4-12.7mm
- Handles
- Alternative bollard tops/Lifting accessories:



Applications

Suitable For:

- Driveways and Accessways
- Car Parks
- Service Areas
- Warehouses & Industrial Sites
- Commercial Properties
- School and Community Facilities
- Parks and Public Spaces
- Residential Properties
- Events and Temporary Closures

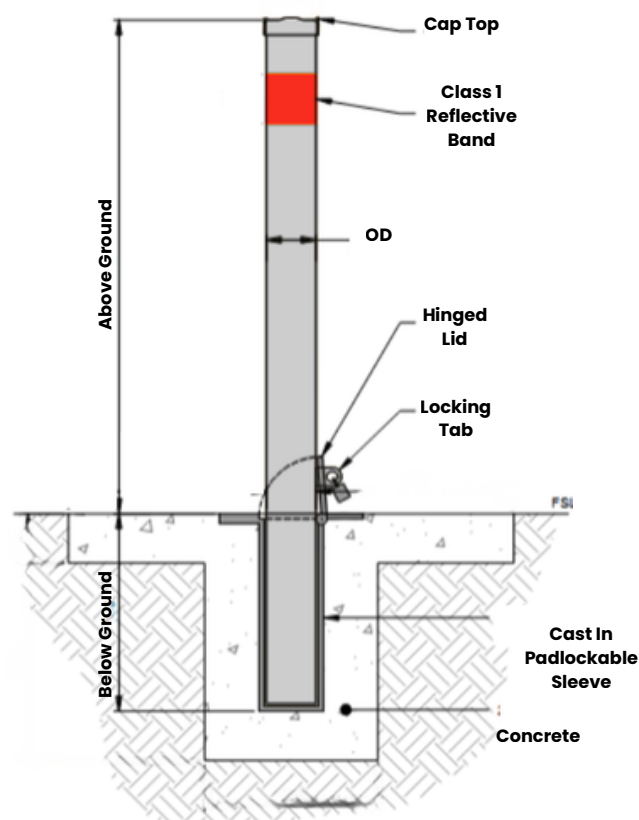

Secure your site with a flexible, practical access-control solution. Removable bollards provide reliable protection against unauthorised vehicle access while allowing convenient removal when access is required. Designed for durability and ease of use, they're ideal for driveways, car parks, commercial properties, pedestrian areas and more.



Outside Diameter (OD)	Wall Thickness	Overall Length	Above Ground	Cast In Sleeve	Product Code	
					304 SCH 10	316 SCH 10
90mm	3.05mm	1200mm	900mm	300mm	PR90F-1200S10-304	PR90F-1200S10-316
90mm	3.05mm	1500mm	1200mm	300mm	PR90F-1500S10-304	PR90F-1500S10-316
101mm	3.05mm	1200mm	900mm	300mm	PR101F-1200S10-304	PR101F-1200S10-316
101mm	3.05mm	1500mm	1200mm	300mm	PR101F-1500S10-304	PR101F-1500S10-316
115mm	3.05mm	1200mm	900mm	300mm	PR115F-1200S10-304	PR115F-1200S10-316
115mm	3.05mm	1500mm	1200mm	300mm	PR115F-1500S10-304	PR115F-1500S10-316
141mm	3.40mm	1200mm	900mm	300mm	PR141F-1200S10-304	PR141F-1200S10-316
141mm	3.40mm	1500mm	1200mm	300mm	PR141F-1500S10-304	PR141F-1500S10-316
168mm	3.40mm	1300mm	900mm	400mm	PR168F-1300S10-304	PR168F-1300S10-316
168mm	3.40mm	1600mm	1200mm	400mm	PR168F-1600S10-304	PR168F-1600S10-316
220mm	3.76mm	1300mm	900mm	400mm	PR220F-1300S10-304	PR220F-1300S10-316
220mm	3.76mm	1600mm	1200mm	400mm	PR220F-1600S10-304	PR220F-1600S10-316
273mm	4.19mm	1300mm	900mm	400mm	PR273F-1300S10-304	PR273F-1300S10-316
273mm	4.19mm	1600mm	1200mm	400mm	PR273F-1600S10-304	PR273F-1600S10-316
323mm	4.57mm	1300mm	900mm	400mm	PR323F-1300S10-304	PR323F-1300S10-316
323mm	4.57mm	1600mm	1200mm	400mm	PR323F-1600S10-304	PR323F-1600S10-316

Standard Features

All bollards are supplied with:

- Bollard: Stainless Steel SCH 10 CHS to AS/NZS 4673
- Sleeve: Cast in lidded sleeve to AS/NZS 4680
- Tape: 50 mm Class 1 Reflective Band to AS/NZS 1906.1:2017
- Finish: Polished
- Top: Welded Flat Cap

Available Options

- Custom heights manufactured in-house to order.
- Heavy Wall Thickness: 4.8-12.7mm
- Custom logo engraving
- Handles
- Alternative bollard tops:



Applications

Suitable For:

- Driveways and Accessways
- Car Parks
- Service Areas
- Warehouses & Industrial Sites
- Commercial Properties
- School and Community Facilities
- Parks and Public Spaces
- Residential Properties
- Events and Temporary Closures

